





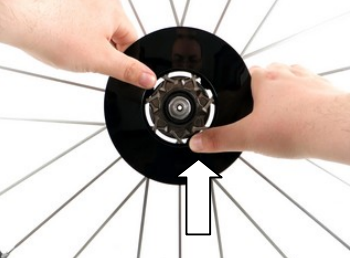



# MAINTENANCE

GROUP	TYPE	OPERATION	REVISION	DESCRIPTION
ROAD WHEELS	ALL	011	1/2011	SPOKE GUARD ASSEMBLY
PRODUCTS ON WHICH THE PROCEDURE SHOULD BE APPLIED				
				
Racing 0™	Racing 1™	Racing 3	Racing 5™	Racing 7™

		
<b>1</b> Insert the spoke guard cover inside the body of the freewheel and attach two teeth of the right flange of the hub's body.	<b>2</b> Attach the third tooth by exerting pressure on the cover.	<b>3</b> Make sure the teeth are firmly attached.

## SPOKE PROTECTORS

RACING 3	50-WH-SP13ZO
RACING QUATTRO	50-WH-SP13ZO
RACING 5	50-WH-SP10SC
RACING 7	50-R7-SP2011